


YSR Radial Locking

The YSR Series locknuts employ 3-way radial locking. Thickness is comparatively thinner than other products. This series is especially applicable for use when locknut space is limited. Aside from where other products are not usable due to space restrictions.

- Material Composition: SCM440(42CrMo4)
- Hardness: HRC28°~32°
- Thread Accuracy: ISO 4H
- Manufacturing Method: High Precision Grinding
- Run Out
M6~200: 0.002mm
- Thread Accuracy: ISO 4H
- Manufacturing Method: High Precision Turning
- Run Out
M6~200: 0.005mm
M210~300: 0.007mm

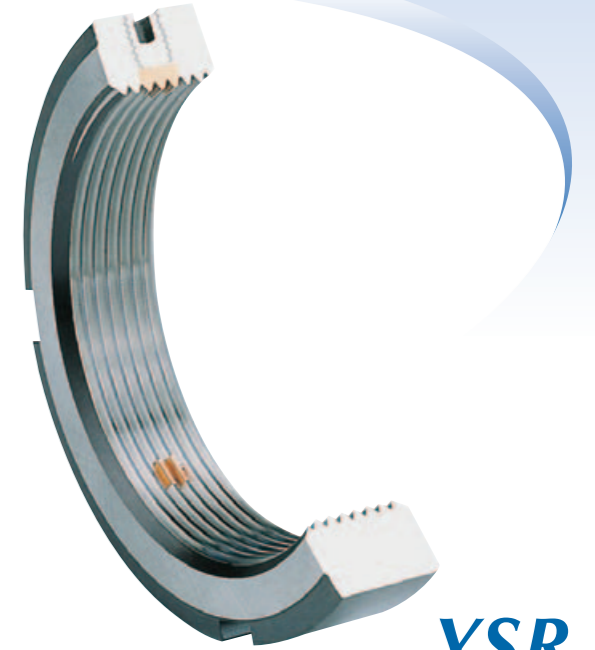

YSR

YSR

Thread	D	h	g	t	d	n - m	MAX. Nm	Thread	D	h	g	t	d	n - m	MAX. Nm
YSR M6 x 0.5	16	8	3	2	11	2 - M4	3.5	YSR M72 x 2	95	18	8	3.5	86	3 - M8	18.0
YSR M8 x 0.75	16	8	3	2	11	2 - M4	3.5	YSR M75 x 2	98	18	8	3.5	90	3 - M8	18.0
YSR M10 x 0.75	18	8	3	2	13	2 - M4	3.5	YSR M76 x 2	100	18	8	3.5	92	3 - M8	18.0
YSR M10 x 1	18	8	3	2	13	2 - M4	3.5	YSR M80 x 2	105	18	8	3.5	96	3 - M8	18.0
YSR M12 x 1	20	8	3	2	16	2 - M4	3.5	YSR M85 x 2	110	18	8	3.5	102	3 - M8	18.0
YSR M12 x 1.25	20	8	3	2	16	2 - M4	3.5	YSR M90 x 2	120	20	10	4	108	3 - M8	18.0
YSR M14 x 1.5	25	8	3	2	21	2 - M4	3.5	YSR M95 x 2	125	20	10	4	113	3 - M8	18.0
YSR M15 x 1	25	8	3	2	21	2 - M4	3.5	YSR M100 x 2	130	20	10	4	118	3 - M8	18.0
YSR M16 x 1.5	28	10	4	2	23	2 - M5	4.5	YSR M105 x 2	140	22	12	5	125	3 - M8	18.0
YSR M17 x 1	28	10	4	2	23	2 - M5	4.5	YSR M110 x 2	145	22	12	5	132	3 - M8	18.0
YSR M18 x 1.5	30	10	4	2	25	2 - M5	4.5	YSR M115 x 2	150	22	12	5	137	3 - M8	18.0
YSR M20 x 1	32	10	4	2	27	3 - M5	4.5	YSR M120 x 2	155	24	12	5	142	3 - M8	18.0
YSR M20 x 1.5	32	10	4	2	27	3 - M5	4.5	YSR M125 x 2	160	24	12	5	147	3 - M8	18.0
YSR M22 x 1.5	35	10	4	2	30	3 - M5	4.5	YSR M130 x 2	165	24	12	5	152	3 - M8	18.0
YSR M24 x 1.5	38	12	5	2	33	3 - M6	8.0	YSR M135 x 2	175	26	14	6	160	3 - M10	35.0
YSR M25 x 1.5	38	12	5	2	33	3 - M6	8.0	YSR M140 x 2	180	26	14	6	165	3 - M10	35.0
YSR M27 x 1.5	42	12	5	2	37	3 - M6	8.0	YSR M145 x 2	190	26	14	6	175	3 - M10	35.0
YSR M30 x 1.5	45	12	5	2	40	3 - M6	8.0	YSR M150 x 2	195	26	14	6	180	3 - M10	35.0
YSR M33 x 1.5	52	12	5	2	45	3 - M6	8.0	YSR M155 x 3	200	28	16	7	180	3 - M10	35.0
YSR M35 x 1.5	52	12	5	2	47	3 - M6	8.0	YSR M160 x 3	210	28	16	7	190	3 - M10	35.0
YSR M36 x 1.5	55	14	6	2.5	49	3 - M6	8.0	YSR M165 x 3	210	28	16	7	190	3 - M10	35.0
YSR M39 x 1.5	58	14	6	2.5	52	3 - M6	8.0	YSR M170 x 3	220	28	16	7	200	3 - M10	35.0
YSR M40 x 1.5	58	14	6	2.5	52	3 - M6	8.0	YSR M180 x 3	230	30	18	8	205	3 - M12	60.0
YSR M42 x 1.5	62	14	6	2.5	56	3 - M6	8.0	YSR M190 x 3	240	30	18	8	215	3 - M12	60.0
YSR M45 x 1.5	65	14	6	2.5	59	3 - M6	8.0	YSR M200 x 3	250	32	18	8	225	3 - M12	60.0
YSR M48 x 1.5	68	14	6	2.5	62	3 - M6	8.0	YSR-M210 x 3	260	32	18	8	240	3 - M12	60.0
YSR M50 x 1.5	70	14	6	2.5	64	3 - M8	18.0	YSR-M220 x 3	270	32	18	8	250	3 - M12	60.0
YSR M52 x 1.5	73	16	7	3	66	3 - M8	18.0	YSR-M230 x 3	280	34	20	9	258	3 - M12	60.0
YSR M55 x 1.5	75	16	7	3	68	3 - M8	18.0	YSR-M240 x 3	290	34	20	9	268	3 - M12	60.0
YSR M55 x 2	75	16	7	3	68	3 - M8	18.0	YSR-M250 x 3	300	34	20	9	278	3 - M12	60.0
YSR M56 x 2	77	16	7	3	70	3 - M8	18.0	YSR-M260 x 4	310	34	22	10	288	3 - M14	100.0
YSR M60 x 2	80	16	7	3	73	3 - M8	18.0	YSR-M270 x 4	320	34	22	10	298	3 - M14	100.0
YSR M64 x 2	85	16	7	3	78	3 - M8	18.0	YSR-M280 x 4	330	34	22	10	308	3 - M14	100.0
YSR M65 x 2	85	16	7	3	78	3 - M8	18.0	YSR-M290 x 4	340	36	24	11	315	3 - M14	100.0
YSR M68 x 2	92	18	8	3.5	84	3 - M8	18.0	YSR-M300 x 4	350	36	24	11	325	3 - M14	100.0
YSR M70 x 2	92	18	8	3.5	84	3 - M8	18.0								